

10.3.1 Relative positioning of interfering link (Generic system)

The relative position of the Victim Receiver (VLR) and the Interfering Transmitter (ILT) depends on the various options presented below. There is a unique simulation radius (R_{simu}) contrary to the 2 coverage radius (one for the victim and one for the interferer link). This is illustrated below in Figure 223 for a generic system interfering with a second generic system.

See ANNEX 12: for further details on the algorithm and conventions.

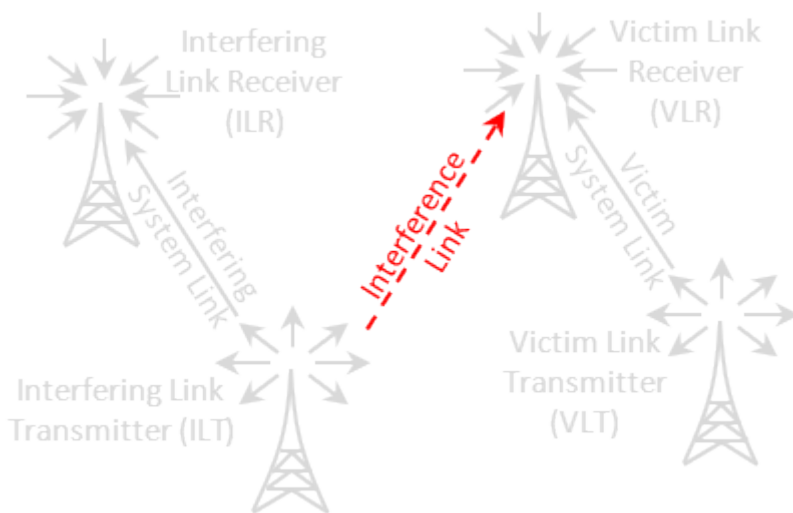


Figure 223: Example of the simulation radius (VLR with ILT)

Depending on the system simulated several positioning options are possible when the generic system is the interferer and the victim is a generic system and cellular system as shown in Figure 224 and Figure 227 respectively.

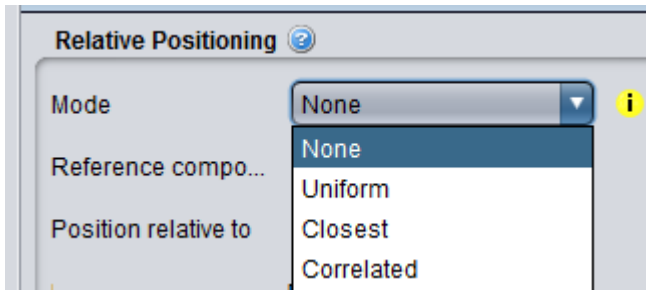


Figure 224: Relative positioning of a generic interfering link with a generic victim system

Each interfering signal calculation results from the contribution of

- **None:** n_{active} interfering link transmitters located in a circular area with the simulation radius. You define yourself the radius. The random placement of the interfering link transmitters in this area is defined by the path azimuth and the path distance factor parameters.

See Annex A13.2.1 for detailed algorithm.

Table 42: ILT-VLR path - none mode (generic vs generic)

Description	Symbol	Type	Unit	Comments
Reference component	-		-	Positioning of the distributed component which is either the ILT or the ILR
Position relative to	-		-	Positioning of the reference component relative to either the VLR or the VLT
Delta X	ΔX	Distribution or Scalar	km	Horizontal distance between the transmitter and receiver. It can be used to shift horizontally the distributed receivers

Delta Y	ΔY	Distribution or Scalar	km	Vertical distance between the transmitter and receiver. It can be used to shift vertically the distributed receivers
Set ILR at the center of the ILT distribution	-	Boolean	-	set the distance factor distribution of the ILT with regards to the VLR. It overwrites the settings in the transmitter to receiver path of the interferer
Path azimuth		Distribution or Scalar	Deg	Horizontal angle for the location of the ILT respect to the victim link. If constant, the Rx's location will be on a straight line. If not, the location of the Rx will be on an angular area. (See Annex A12.3)
Path distance factor		Distribution or Scalar		Distance factor to describe path length between the ILT and VLR. This factor will be multiplied by R_{simu} to obtain the coverage area. Therefore, the trialled distance between ILT and VLR will be $R_{simu} * \text{Path factor}$. E.g. if user enters a distribution 0...1, then the distance will be between 0 and R_{simu} . If the path factor is constant, the ILT will be located on a circle around the VLR which means that the distance between the ILT and VLR will not change
Simulation radius	R_{simu}		km	User defined

Number of active transmitter	n_{active}	Scalar		If $n_{\text{active}} > 1$, this will result in spatially-independent generation of the specified number of lts, whereas the resulting total iRSS strength will be obtained by simple power summation of the individual iRSS signal values.
Minimum coupling loss	MCL	Distribution or Scalar	dB	The minimum path loss. It is used in the calculation of the effective path loss (Section 7.6)
Protection distance	d_0	Distribution or Scalar	(km)	minimum protection distance between the victim link receiver and interfering link transmitter (Section A13.2.3)
Use of polygon				You are also able to select a polygon shape as an alternative to the default circle. A various selection of polygon is available. You are able to rotate counter-clock wise (ccw) the polygon shape.
Co-locate				This feature allows deploying two interferers at the same location and their two transmitters could be transmitting at the same time while having different transmitter characteristics (e.g. emission mask, antenna radiation pattern...)

- **Uniform density:** Each interfering signal calculation results from the contribution of n_{active} **interfering link transmitters** uniformly located in a circular area. The

parameters are taken from the system settings (see section A13.2.2.)

Transmitter Density and Traffic ⓘ

Density of Tx: 1.0 1/km²

Prob. of transmission: 1.0

Activity [Constant (1.0)]: Function 1/h

Time: 1.0 hour

Figure 225: Transmitter density and traffic

Table 43: ILT-VLR path - Uniform density mode (generic vs generic)

Description	Symbol	Type	Unit	Comments
Reference component	-		-	Positioning of the distributed component which is either the ILT or the ILR
Position relative to	-	Boolean	-	Positioning of the Reference component relative to either the VLR or the VLT
Delta X	ΔX	Distribution or Scalar	km	Horizontal distance between the transmitter and receiver. It can be used to shift horizontally the distributed receivers.
Delta Y	ΔY	Distribution or Scalar	km	Vertical distance between the transmitter and receiver. It can be used to shift vertically the distributed receivers.

set ILR at the center of the ILT distribution	-	Boolean	-	Set the distance factor distribution of the ILT with regards to the VLR. It overwrites the settings in the transmitter to receiver path of the interferer.
Path azimuth		Distribution or Scalar	Deg	Horizontal angle for the location of the ILT respect to the victim link. If constant, the Rx's location will be on a straight line. If not, the location of the Rx will be on an angular area. (See Annex A12.3)
Number of active transmitter	nactive	Scalar		Number of active interferers in the simulation (nactive should be sufficiently large so that the (n+1)th interferer would bring a negligible additional interfering power). If $n_{\text{active}} > 1$, this will result in spatially-independent generation of the specified number of IIs, whereas the resulting total iRSS strength will be obtained by simple power summation of the individual iRSS signal values.
Simulation radius	R_{simu}		km	Note: the simulation radius value is readable only after each simulation

Interferes density				A simulation radius is calculated, R_{simu}. Interfering link transmitters will be randomly deployed within the area centred on the Victim link receiver and delimited by the simulation radius R_{simu}. If a protection is defined then Interfering link transmitters will be randomly deployed within the area centred in the Victim link receiver and delimited by the protection distance and the simulation radius R_{simu}. See Table 46 for information on the input parameter and Annex A13.2.2 for the calculation.
Minimum coupling loss	MCL	Distribution or Scalar	dB	The minimum path loss. It is used in the calculation of the effective path loss (Section 7.6)
Protection distance	d0	Scalar	(km)	Minimum protection distance between the victim link receiver and interfering link transmitter (Section A13.2.3)
Co-locate				This feature allows deploying two interferers at the same location and their two transmitters could be transmitting at the same time while having different transmitter characteristics (e.g. emission mask, antenna radiation pattern...)

- **Closest interferer:** Each interfering signal calculation results from the contribution of **just one interfering link transmitter**. This ILT is randomly placed in a circular area with a simulation radius derived from the density of interferers. See Annex A13.2.4 for detailed algorithm. The parameters are taken from the system settings (see section A13.2.4).
-

Transmitter Density and Traffic ⓘ

Density of Tx: 1.0 1/km²

Prob. of transmission: 1.0

Activity [Constant (1.0)]: Function 1/h

Time: 1.0 hour

Figure 226: Transmitter density and traffic

Table 44: ILT-VLR path - Closest interferer mode (generic vs generic)

Description	Symbol	Type	Unit	Comments
Reference component	-		-	Positioning of the distributed component which is either the ILT or the ILR
Position relative to	-	-	-	Positioning of the Reference component relative to either the VLR or the VLT
Delta X	ΔX	Distribution or Scalar	km	Horizontal distance between the transmitter and receiver. It can be used to shift horizontally the distributed receivers
Delta Y	ΔY	Distribution or Scalar	km	Vertical distance between the transmitter and receiver. It can be used to shift vertically the distributed receivers

Set ILR at he center of the ILT distribution	-	Boolean	-	Set the distance factor distribution of the ILT with regards to the VLR. It overwrites the settings in the transmitter to reveicer path of the interferer
Path azimuth		Distribution or Scalar	Deg	Horizontal angle for the location of the ILT respect to the victim link. If constant, the Rx's location will be on a straight line. If not, the location of the Rx will be on an angular area. (See Annex A1.1)
Number of active transmitter	nactive	Scalar		Number of active interferers in the simulation (nactive should be sufficiently large so that the (n+1)th interferer would bring a negligible additional interfering power). If $n_{\text{active}} > 1$, this will result in spatially-independent generation of the specified number of Its, whereas the resulting total iRSS strength will be obtained by simple power summation of the individual iRSS signal values
Simulation radius	R_{simu}		km	<i>Note: the simulation radius value is readable only after each simulation</i>

Interferes density				The distance between the Victim link receiver and the Interfering link transmitter follows a Rayleigh distribution, where the standard deviation is given by . See Table 47 for information on the input parameter and Annex A13.2.4 for the calculation
Minimum coupling loss	MCL	Distribution or Scalar	dB	The minimum path loss. It is used in the calculation of the effective path loss (Section 7.6)
Protection distance	d0	Scalar	(km)	minimum protection distance between the victim link receiver and interfering link transmitter (Section A13.2.3)
Co-locate				This feature allows deploying two interferers at the same location and their two transmitters could be transmitting at the same time while having different transmitter characteristics (e.g. emission mask, antenna radiation pattern...)

- **Correlated** : It is called the correlated mode. It means that the positions of the receiver and transmitter are geographically fixed with respect to each other (e.g. co-located or constantly spaced base stations). In the following four cases of fixed placement, the relative location of the two pair of transmitter and receiver is described by dX/dY displacement, with the origin being either on the Transmitter or Receiver of the victim link depending on the option selected;

Table 45: ILT-VLR path - Correlated mode (generic vs generic)

Description	Symbol	Type	Unit	Comments
Reference component	-		-	Positioning of the distributed component which is either the ILT or the ILR
Position relative to	-	B	-	Positioning of the fixed interfere transmitter (ILT) or receiver (ILR) with the origin being. Reference component relative to either on the VLR or the victim link transmitter (VLT) or receiver (VLR) on the option selected.
Delta X	ΔX	Distribution or Scalar	km	Horizontal distance between the transmitter and receiver. It can be used to shift horizontally the distributed receivers.
Delta Y	ΔY	Distribution or Scalar	km	Vertical distance between the transmitter and receiver. It can be used to shift vertically the distributed receivers.
Minimum coupling loss	MCL	Distribution or Scalar	dB	The minimum path loss. It is used in the calculation of the effective path loss (Section 7.6)

In the case the victim system is a cellular system (CDMA or OFDMA, either UL or DL), the options are slightly changed as shown below, where Position relative to is always the BS of the reference cell.

Relative Positioning

Mode

None

i

Reference compo...

ILT

Position relative to

Victim BS ref.cell

Delta X

[Constant(0.0)]

Distribution

km

Delta Y

[Constant(0.0)]

Distribution

km

Minimum coupling ...

[Constant(0.0)]

Distribution

dB

Figure 227: Relative positioning of a generic interfering link with a cellular victim system



Revision #1

Created 2026-04-21 07:43:26 UTC by ECO TECH

Updated 2026-04-21 07:47:50 UTC by ECO TECH