

13.4.2 Spectrum emission mask elements

To create or modify a library element containing parameters of a particular spectrum mask, select the **Spectrum emission masks** command from the **Library pull-down menu** or directly with **CTRL+SHIFT+S**.

A list of existing pre-defined spectrum emission mask will be selectable as shown in the figure below. This is an example of a LTE UE (Table 6.6.3.1-2 of 3GPP TS 36.101) where the limit for the spurious emission domain (outside ± 12.5 MHz) applies to frequencies above 1000 MHz:

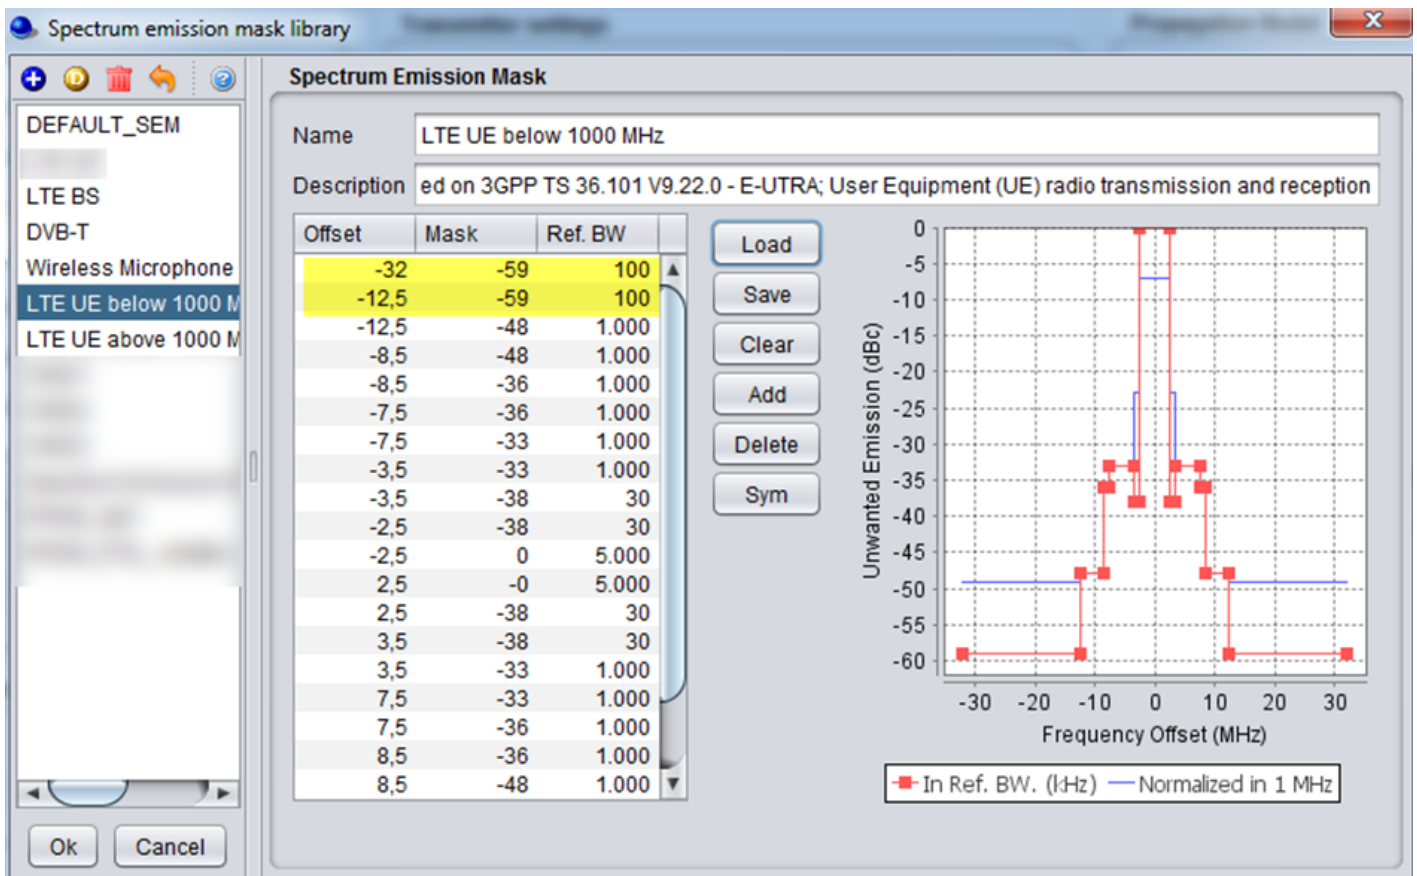


Figure 284: Spectrum emission mask library elements

When adding a new spectrum emission mask, enter the name (unique identifier) and description of its technical parameters.

Note 1: It is possible to quickly scroll up and down and see the differences in the masks.

Note 2: It is possible to create a mask from the workspace and export it to your library environment



Figure 285: Example on how to import/export to/from the workspace/library for the spectrum emission mask

Revision #1

Created 2026-06-22 07:55:26 UTC by ECO TECH

Updated 2026-06-22 07:56:11 UTC by ECO TECH