

10.3.3 Interferers density

The panel is activated if "Uniform density" or/and "closest interferer" mode is selected. See Annex

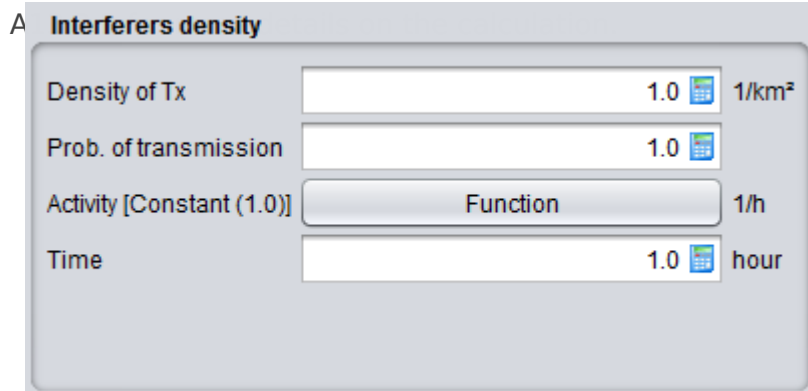


Figure 230: Interferers density panel

(only in "Uniform density" and "closest interferer" mode)

Table 47: Setting up the interferes density

Description	Symbol	Type	Unit	Comments
Density of transmitters	dens_{it}	Scalar	1/km ²	Maximum number of active transmitters per km ²
Probability of transmission	P_{it}	Scalar	%	
Activity	activity_{it}	Function (X,Y)	1/h	Temporal activity variation as a function of the time of the day (hh/mm/ss)
Time	time	Scalar	hour	Time of the day. If the activity function (above), here it should be specified which hour (from the defined range of function) should be considered in a simulation

Revision #1

Created 2026-04-21 07:49:25 UTC by ECO TECH

Updated 2026-04-21 07:50:14 UTC by ECO TECH