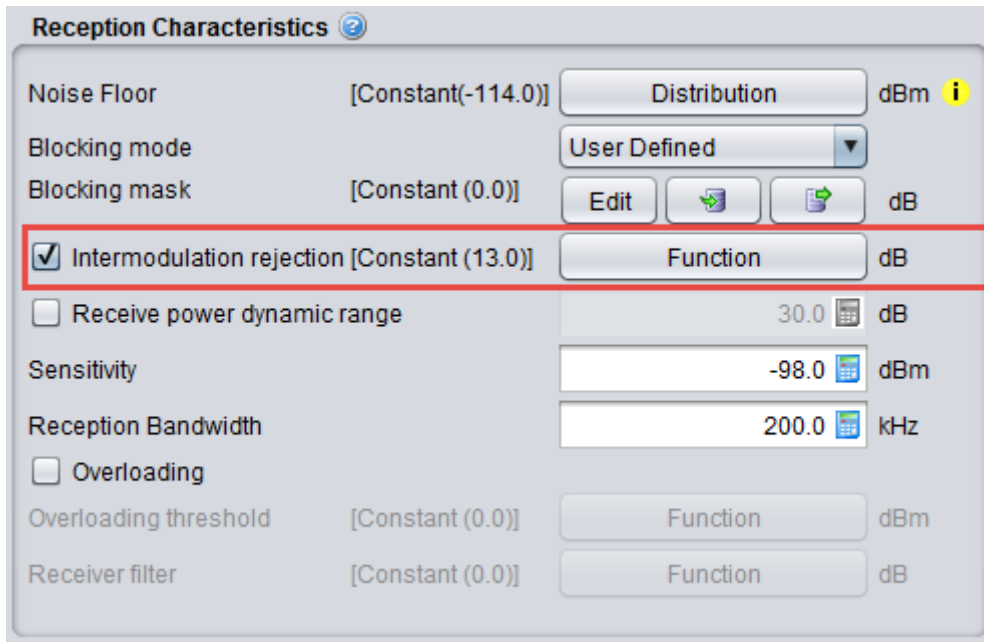


# 4.3 iRSSintermodulation

The following graphics presents the input parameters to activate when the intermodulation mechanism is to be investigated. The intermodulation rejection mask is expressed in dB versus frequency offset (MHz). Results details can be found in Section 12.3.3.



**Figure 106: Activation of the intermodulation feature in SEAMCAT**

Revision #1

Created 2026-04-15 04:44:57 UTC by ECO TECH

Updated 2026-04-15 04:45:24 UTC by ECO TECH