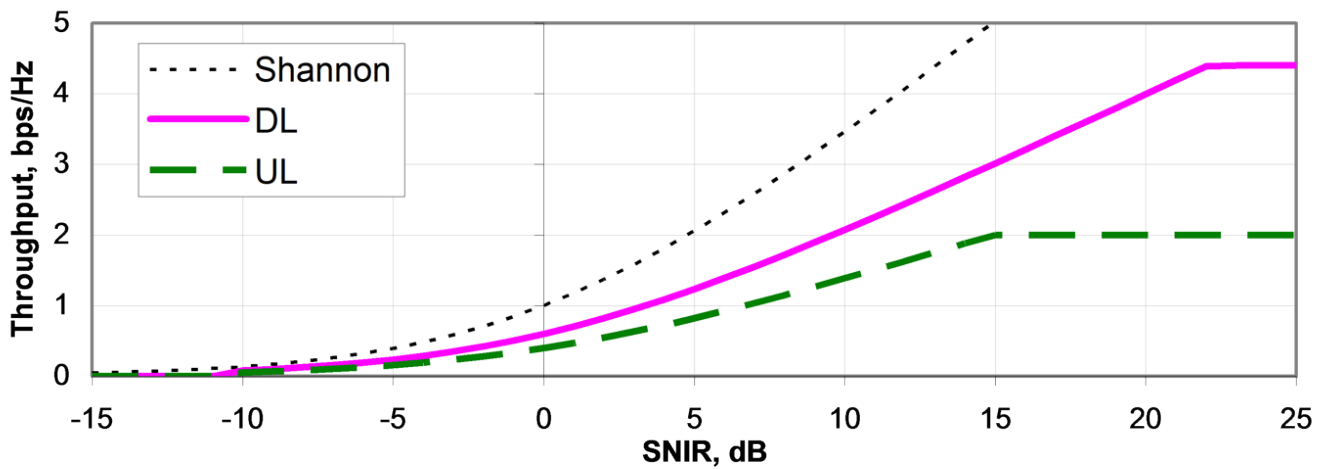


# 9.5 Link-to-system level mapping

A look up table is used to map throughput in terms of spectral efficiency (bps per Hz) with respect to calculated SINR (=  $C/(I+N)$ ) (dB) level. This link level data (bitrate mapping) is user selectable and can be modified depending on the simulation to perform.



**Figure 204: Throughput vs SINR for Baseline E-UTRA Coexistence Studies (source: [12])**

Revision #1

Created 2026-04-17 13:29:31 UTC by ECO TECH

Updated 2026-04-17 13:30:00 UTC by ECO TECH